



X3

TASSELLO PROLUNGATO AD ALTE PRESTAZIONI HIGH PERFORMANCE LONG PLUG




**MASSIMA TENUTA ALL'ESTRAZIONE
PERFORMANCE STRAORDINARIE
SU TUTTI I MATERIALI**

MAXIMUM PULL-OUT VALUES
EXTRAORDINARY PERFORMANCE
ON ALL BASE MATERIALS



**FINO A TRE PROFONDITÀ
DI ANCORAGGIO
ESTREMA VERSATILITÀ E NOTEVOLE
RIDUZIONE DEI TEMPI DI POSA**

UP TO 3 EMBEDMENT DEPTHS
EXTREME VERSATILITY AND SIGNIFICANT
REDUCTION IN INSTALLATION TIME




**ESPANSIONE MAGGIORATA
PROGETTATO PER FACCIATE
E CARPENTERIA PESANTE**

INCREASED EXPANSION
DESIGNED FOR FACADES AND HEAVY CARPENTRY



L'ancorante che raggiunge le massime prestazioni ottenibili da un tassello plastico. Certificato per tutti i principali supporti, si distingue per la sua espansione radiale maggiorata, che permette ottima tenuta con tempi di posa ridotti. È la soluzione perfetta per il fissaggio di carpenterie pesanti e di supporti per facciate ventilate.

The anchor that reaches the highest performance obtainable from a nylon anchor. Certified for all major base materials, distinguished by its increased radial expansion, which allows excellent pull-out values with reduced installation time. It is the perfect solution for fixing heavy carpentry and ventilated façade supports.

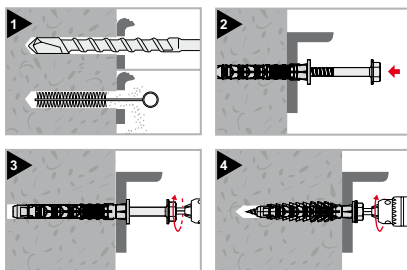

Pozidrive Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. max fissabile per posa Fixing thickness for embedment depth			Conf. Pkg.	Imballo Outerbox
			Ridotta Reduced	Standard	Maggiorata ⁽¹⁾ Increased ⁽¹⁾		
64601b06035*	6x35	4,5x40	10	5	-	100	1000
64601b06050*	6x50	4,5x55	25	20	-	100	1000
64601b06060*	6x60	4,5x65	35	30	-	100	1000
64601b06070*	6x70	4,5x75	45	40	-	100	1000
64601b08060	8x60	6x68	20	10	-	50	500
64601b08080	8x80	6x88	40	30	-	50	500
64601b08100	8x100	6x108	60	50	-	50	500
64601b08120	8x120	6x128	80	70	-	50	500
64601b10060	10x60	7x68	10	-	-	50	500
64601b10080	10x80	7x88	30	10	-	50	500
64601b10100	10x100	7x108	50	30	10	50	500
64601b10120	10x120	7x128	70	50	30	50	500
64601b10140	10x140	7x148	90	70	50	50	300
64601b10160	10x160	7x168	110	90	70	50	250

⁽¹⁾ Solo per cemento cellulare / Only for aerated concrete

* Non certificato CE / Not covered by CE certification

X3

**Tassello prolungato
ad alte prestazioni**
High performance long plug



Tassello bordo svasato
Vite TPS

Zincata bianca
Ø 4,5 impronta Pozidrive n°2
Ø 6 impronta Pozidrive n°3
Ø 7 impronta Pozidrive n°4

Countersunk rim plug
Countersunk head screw
White zinc plated
Ø 4,5 Pozidrive n°2 recess
Ø 6 Pozidrive n°3 recess
Ø 7 Pozidrive n°4 recess



PLUS

- Brevettato in Italia
Italian patent
- Domanda di brevetto europeo pendente
European patent pending



Classe di resistenza al fuoco 90 minuti
in calcestruzzo, tassello Ø10

Fire resistance class = 90 minutes plug Ø10
in concrete



ITA



ENG


X3

Tassello prolungato ad alte prestazioni High performance long plug

Tassello bordo svasato
Vite TPS

Zincata bianca
Ø 6 impronta Torx T30
Ø 7 impronta Torx T40

Countersunk rim plug
Countersunk head screw
White zinc plated
Ø 6 Torx T30 recess
Ø 7 Torx T40 recess



Tassello bordo svasato
Vite TPS

Speciale rivestimento
anticorrosione
con finitura opaca
Ø 6 impronta Torx T30
Ø 7 impronta Torx T40

Countersunk rim plug
Countersunk head screw
Special anti-corrosion coating
with matte finish
Ø 6 Torx T30 recess
Ø 7 Torx T40 recess



3DG
COATING

Tassello bordo svasato
Vite TPS

Inox A4-70
Ø 6 impronta Torx T30
Ø 7 impronta Torx T40

Countersunk rim plug
Countersunk head screw
Stainless steel A4-70
Ø 6 Torx T30 recess
Ø 7 Torx T40 recess



INOX
A4
70



Torx Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. max fissabile per posa Fixing thickness for embedment depth			Conf. Pkg.	Imballo Outerbox
			Ridotta Reduced	Standard	Maggiorata ⁽¹⁾ Increased ⁽¹⁾		
64602b08060	8x60	6x68	20	10	-	50	500
64602b08080	8x80	6x88	40	30	-	50	500
64602b08100	8x100	6x108	60	50	-	50	500
64602b08120	8x120	6x128	80	70	-	50	500
64602b10060	10x60	7x68	10	-	-	50	500
64602b10080	10x80	7x88	30	10	-	50	500
64602b10100	10x100	7x108	50	30	10	50	500
64602b10120	10x120	7x128	70	50	30	50	500
64602b10140	10x140	7x148	90	70	50	50	300
64602b10160	10x160	7x168	110	90	70	50	250
64602b10200	NEW 10x200	7x208	150	130	110	50	-
64602b10230	NEW 10x230	7x238	180	160	140	50	-
64602b10260	10x260	7x268	210	190	170	50	-
64602b10290	10x290	7x298	240	220	200	50	-

⁽¹⁾ Solo per cemento cellulare / Only for aerated concrete



Torx Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. max fissabile per posa Fixing thickness for embedment depth			Conf. Pkg.	Imballo Outerbox
			Ridotta Reduced	Standard	Maggiorata ⁽¹⁾ Increased ⁽¹⁾		
64602c08060▲	8x60	6x68	20	10	-	50	500
64602c08080▲	8x80	6x88	40	30	-	50	500
64602c08100▲	8x100	6x108	60	50	-	50	500
64602c08120▲	8x120	6x128	80	70	-	50	500
64602c10060▲	10x60	7x68	10	-	-	50	500
64602c10080▲	10x80	7x88	30	10	-	50	500
64602c10100▲	10x100	7x108	50	30	10	50	500
64602c10120▲	10x120	7x128	70	50	30	50	500
64602c10140▲	10x140	7x148	90	70	50	50	300
64602c10160▲	10x160	7x168	110	90	70	50	250

⁽¹⁾ Solo per cemento cellulare / Only for aerated concrete



Torx Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. max fissabile per posa Fixing thickness for embedment depth			Conf. Pkg.	Imballo Outerbox
			Ridotta Reduced	Standard	Maggiorata ⁽¹⁾ Increased ⁽¹⁾		
64602008060	8x60	6x68	20	10	-	50	500
64602008080	8x80	6x88	40	30	-	50	500
64602008100	8x100	6x108	60	50	-	50	500
64602008120	8x120	6x128	80	70	-	50	500
64602010060	10x60	7x68	10	-	-	50	500
64602010080	10x80	7x88	30	10	-	50	500
64602010100	10x100	7x108	50	30	10	50	500
64602010120	10x120	7x128	70	50	30	50	500
64602010140	10x140	7x148	90	70	50	50	300
64602010160	10x160	7x168	110	90	70	50	250

⁽¹⁾ Solo per cemento cellulare / Only for aerated concrete



Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. max fissabile per posa Fixing thickness for embedment depth			Conf. Pkg.	Imballo Outerbox
			Ridotta Reduced	Standard	Maggiorata ⁽¹⁾ Increased ⁽¹⁾		
64603b10060	10x60	7x68	10	-	-	50	500
64603b10080	10x80	7x88	30	10	-	50	500
64603b10100	10x100	7x108	50	30	10	50	500
64603b10120	10x120	7x128	70	50	30	50	300
64603b10140	10x140	7x148	90	70	50	50	300
64603b10160	10x160	7x168	110	90	70	50	250

⁽¹⁾ Solo per cemento cellulare / Only for aerated concrete



Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. max fissabile per posa Fixing thickness for embedment depth			Conf. Pkg.	Imballo Outerbox
			Ridotta Reduced	Standard	Maggiorata ⁽¹⁾ Increased ⁽¹⁾		
64603c10060▲	10x60	7x68	10	-	-	50	500
64603c10080▲	10x80	7x88	30	10	-	50	500
64603c10100▲	10x100	7x108	50	30	10	50	500

⁽¹⁾ Solo per cemento cellulare / Only for aerated concrete



Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. max fissabile per posa Fixing thickness for embedment depth			Conf. Pkg.	Imballo Outerbox
			Ridotta Reduced	Standard	Maggiorata ⁽¹⁾ Increased ⁽¹⁾		
64603010060	10x60	7x68	10	-	-	50	500
64603010080	10x80	7x88	30	10	-	50	500
64603010100	10x100	7x108	50	30	10	50	500

⁽¹⁾ Solo per cemento cellulare / Only for aerated concrete

**Tassello bordo svasato
Vite TER
con rondella integrata Ø19
Zincata bianca
Chiave 13, impronta Torx T40**

Countersunk rim plug
Special hex head screw
with built-in washer Ø19
White zinc plated
Wrench 13, Torx T40 recess



**Tassello bordo svasato
Vite TER
con rondella integrata Ø19
Speciale rivestimento
anticorrosione
con finitura opaca
Chiave 13, impronta Torx T40**

Countersunk rim plug
Special hex head screw
with built-in washer Ø19
Special anti-corrosion coating
with matte finish
Wrench 13, Torx T40 recess



**3DG
COATING**

**Tassello bordo svasato
Vite TER
con rondella integrata Ø19
Inox A4-70
Chiave 13, impronta Torx T40**

Countersunk rim plug
Special hex head screw
with built-in washer Ø19
Stainless steel A4-70
Wrench 13, Torx T40 recess



**INOX
A4
70**

**FISSAGGI PROLUNGATI
LONG FIXINGS**

**FISSAGGI METALLICI - CHIMICI - PLASTICI
METALLIC - CHEMICAL - NYLON FIXINGS**

**CATALOGO 2024
CATALOGUE 2024**

X3

Tassello prolungato ad alte prestazioni High performance long plug

Tassello bordo maggiorato Ø18
Vite TER
con rondella integrata Ø19
Zincata bianca
Chiave 13, impronta Torx T40

Plug with large rim Ø18
Special hex head screw
with built-in washer Ø19
White zinc plated
Wrench 13, Torx T40 recess



Tassello bordo maggiorato Ø18
Vite TER
con rondella integrata Ø19
Speciale rivestimento
anticorrosione
con finitura opaca
Chiave 13, impronta Torx T40

Plug with large rim Ø18
Special hex head screw
with built-in washer Ø19
Special anti-corrosion coating
with matte finish
Wrench 13, Torx T40 recess



3DG
COATING

Tassello bordo maggiorato Ø18
Vite TER
con rondella integrata Ø19
Inox A4-70
Chiave 13, impronta Torx T40

Plug with large rim Ø18
Special hex head screw
with built-in washer Ø19
Stainless steel A4-70
Wrench 13, Torx T40 recess



INOX
A4
70



Cod.	Solo tassello Plug only Cod.*	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. max fissabile per posa Fixing thickness for embedment depth			Conf. Pkg. ⁽²⁾	Imballo ⁽²⁾ Outerbox ⁽²⁾
				Ridotta Reduced	Standard	Maggiorata ⁽¹⁾ Increased ⁽¹⁾		
64703b10060	64700010060▲	10x60	7x68	10	-	-	50	500
64703b10080	64700010080▲	10x80	7x88	30	10	-	50	500
64703b10100	64700010100▲	10x100	7x108	50	30	10	50	500
64703b10120	64700010120▲	10x120	7x128	70	50	30	50	300
64703b10140	64700010140▲	10x140	7x148	90	70	50	50	300
64703b10160	64700010160▲	10x160	7x168	110	90	70	50	250

⁽¹⁾ Solo per cemento cellulare / Only for aerated concrete

⁽²⁾ Per versione solo tassello Conf. 100 e Imballo 1000 / For plug only codes: Pkg. 100 and Outerbox 1000

* Non certificato CE / Not covered by CE certification



Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. max fissabile per posa Fixing thickness for embedment depth			Conf. Pkg.	Imballo Outerbox
			Ridotta Reduced	Standard	Maggiorata ⁽¹⁾ Increased ⁽¹⁾		
64703c10060	10x60	7x68	10	-	-	50	500
64703c10080	10x80	7x88	30	10	-	50	500
64703c10100	10x100	7x108	50	30	10	50	500
64703c10120	10x120	7x128	70	50	30	50	300
64703c10140	10x140	7x148	90	70	50	50	300
64703c10160	10x160	7x168	110	90	70	50	250

⁽¹⁾ Solo per cemento cellulare / Only for aerated concrete



Cod.	Tassello Plug Ø x L	Vite Screw Ø x L	Sp. max fissabile per posa Fixing thickness for embedment depth			Conf. Pkg.	Imballo Outerbox
			Ridotta Reduced	Standard	Maggiorata ⁽¹⁾ Increased ⁽¹⁾		
64703010060	10x60	7x68	10	-	-	50	500
64703010080	10x80	7x88	30	10	-	50	500
64703010100	10x100	7x108	50	30	10	50	500
64703010120	10x120	7x128	70	50	30	50	300
64703010140	10x140	7x148	90	70	50	50	300
64703010160	10x160	7x168	110	90	70	50	250

⁽¹⁾ Solo per cemento cellulare / Only for aerated concrete